



METER · MIX · DISPENSE

variomix A / H

FOR THE PROCESSING OF LOW
TO HIGH VISCOSITY MATERIALS



Application areas

- Coating
- Sealing
- Gluing
- Laminating
- Encapsulating

Function

Pressure vessels, mounted onto a portable chassis, are used to supply the material into the piston type metering pumps where they are proportioned at the pre-selected ratio. The pumps are driven by an air motor. The stroke of the air motor is transferred to the pumps via a lever system. The mixing ratio can be infinitely adjusted between its limits by means of the lever system. The system is controlled by a metering computer.

The variomix A is fitted with a static mixing system that includes a 2K valve combined with a disposable static mixer. The valve contains an infinitely adjustable «snuffer» effect to avoid dripping after metering has finished. Should mixed material be allowed to cure in the mixer, it can be replaced simply and inexpensively, thus avoiding a time consuming, expensive and environmentally damaging flushing cycle.

Industries

These modern metering systems can be used in any industry where materials need to be applied in a high precision and repeatable way.

- Automotive
- Electrical and electronic
- Renewable energy
- Aerospace
- White goods
- and many more


Features and benefits

- Simple operation
- Variable mixing ratio
- Variable output rate
- Continuous flow rate
- Solvent free



variomix A >

variomix A

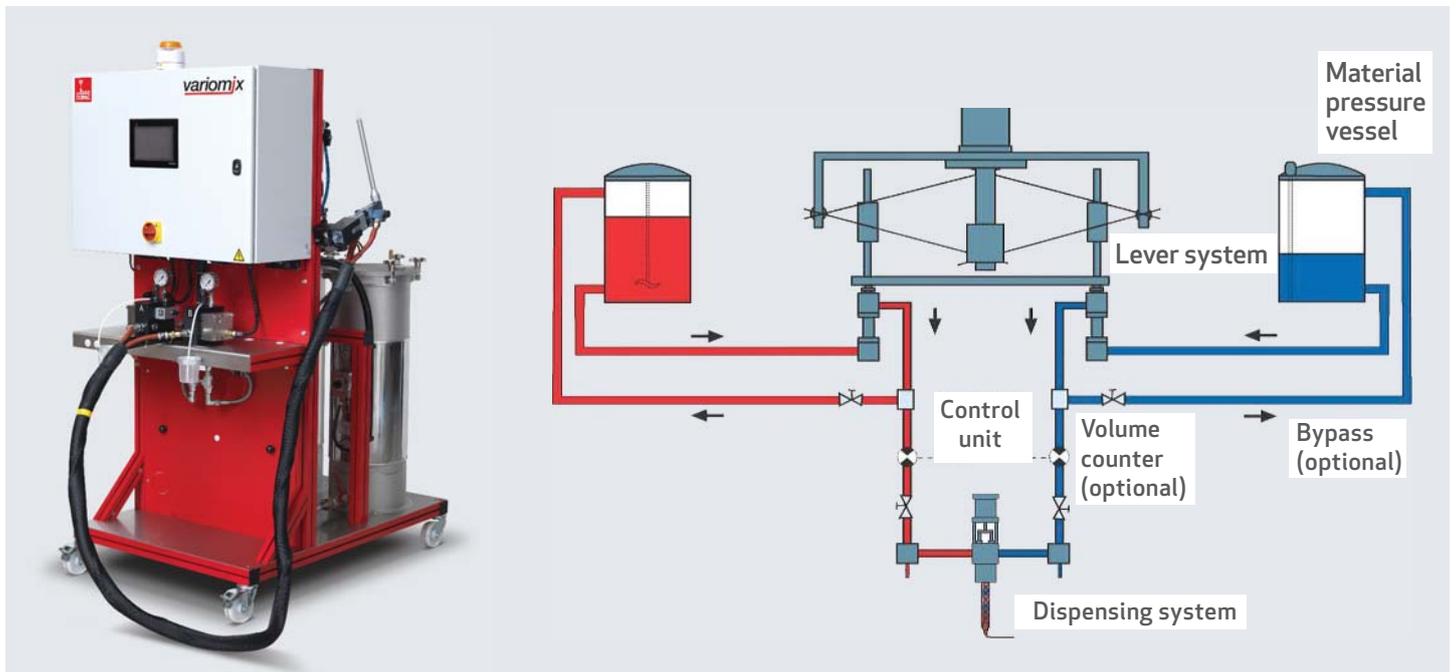


The variomix A is a pneumatic driven piston pump type metering and mixing system, used to handle low to high viscosity multi component media such as epoxy resins, polyurethanes or silicones. They can be unfilled, filled as well

as abrasive. The system is available in two categories, A1 or A2 and is used in different types of applications. Therefore, the system is built in different configurations.

Flow rate	up to 2 l / min with A1, depending on mixing ratio and viscosity up to 8 l / min with A2, depending on mixing ratio and viscosity
Mixing ratio	100 : 100 to 100 : 10, by volume with A1 100 : 100 to 100 : 6, by volume with A2
Maximum working pressure	200 bar
Mixing system	Static mixing system <ul style="list-style-type: none"> ▪ 2K valve ▪ Disposable static mixer
Material supply	Pressure vessels, 6 to 120 l
Viscosity range	50 to 80,000 mPa s, with pressure vessel up to 1,000,000 mPa s, with drum pumps
Material characteristics	Unfilled, filled, abrasive
Power supply	110-480 VAC 3/PE / 50/60Hz 230 VAC L/N/PE / 50/60Hz
Maximum air inlet pressure	6 bar
Dimensions, L x W x H	from 1,500 x 1,100 x 1,900 mm
Weight	from 400 kg

variomix H

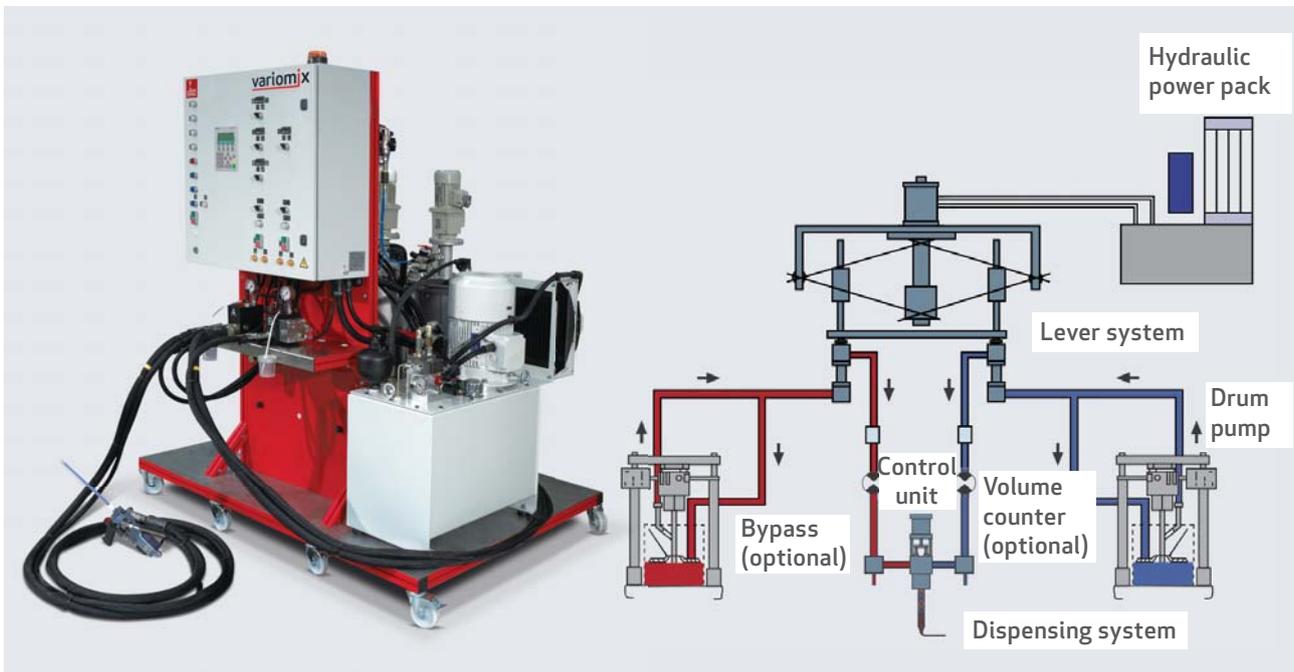

The variomix H is a hydraulically driven piston pump type metering and mixing system, used especially to continuously handle low to high viscosity multi

component media such as epoxy resins, polyurethanes or silicones. They can be unfilled, filled, abrasive as well as aggressive.

Flow rate up to 8 l/min, depending on mixing ratio and viscosity

Mixing ratio 100 : 100 to 100 : 6, by volume

Maximum working pressure 200 bar

Mixing system Static mixing system

- 2K valve
- Disposable static mixer

Material supply Pressure vessels and / or drum pumps

Viscosity range 50 to 80,000 mPa s, with pressure vessel
up to 1,000,000 mPa s, with drum pumps

Material characteristics Unfilled, filled, abrasive

Power supply 380-440 VAC 3/PE / 50/60Hz

Maximum air inlet pressure 6 bar

Dimensions, L x W x H from 1,200 x 800 x 1,950 mm

Weight from 450 - 800 kg

Equipment

variomjx A

Standard

Pressure vessel

Double acting piston pumps

Air motor with lever system

Static mixing system

- Twin snuffer valve
- Disposable static mixer

Metering computer with realtime Multitasking Operating System (64 programs be stored as standard, including 32 programs via external selection)

7" colour touch screen terminal

Optional

Static-dynamic mixing system

- with mixer element monitoring

Material pressure regulator

Material filter

Mixing ratio control and output rate through volume counters

Adjustable output rate

Start/stop trigger via handle grip or foot switch

Pressure vessel with

- level control
- agitator
- automatic refill
- connection for vacuum pump

Material supply through drum pumps for high viscosity materials

Bypass

Heating

variomjx H

Standard

Pressure vessel

Double acting piston pumps

Hydraulic cylinder with lever system and hydraulic power pack

Static mixing system

- Twin snuffer valve
- Disposable static mixer

Metering computer with realtime Multitasking Operating System (64 programs be stored as standard, including 32 programs via external selection)

7" colour touch screen terminal

Optional

Static-dynamic mixing system

- with mixer element monitoring

Material pressure regulator

Material filter

Mixing ratio control and output rate through volume counters

Adjustable output rate

Start/stop trigger via handle grip or foot switch

Pressure vessel with

- level control
- agitator
- automatic refill
- connection for vacuum pump

Material supply through drum pumps for high viscosity materials

Bypass

Heating

Separate drives for the metering pumps (without lever system)



DOPAG is one of the leading manufacturers of metering and mixing technology. In numerous industries, DOPAG systems and components are used for processing and application of multi-component polymers or 1-component media such as adhesives, greases and oils. The company employs more than 300 people and is represented in more than 30 countries by its subsidiaries and distributors.

DOPAG is a member of the HILGER & KERN GROUP that has been a reliable supplier and service partner for industrial enterprises across various market segments for more than 85 years.

Worldwide sales and service



GERMANY, Mannheim

Tel.: +49 621 3705 - 500
info@dopag.de
www.dopag.de

FRANCE, Valence

Tel.: +33 4 75419060
contact@dopag.fr
www.dopag.fr

CHINA, Shanghai

Tel.: +86 21 3368 7775
office@dopag.cn
www.dopag.cn

GREAT BRITAIN, Droitwich

Tel.: +44 1299 250740
uksales@dopag.co.uk
www.dopag.co.uk

SWITZERLAND, Cham

Tel.: +41 41 7855 - 757
info@dopag.ch
www.dopag.ch

ITALY, Alpignano

Tel.: +39 011 9348888
info@dopag.it
www.dopag.it

INDIA, Bangalore

Tel.: +91 80 4092 7888
info@dopag.in
www.dopag.in

USA, Erlanger, KY

Tel.: +1 859 918 5690
ussales@dopag.com
www.dopag.us

Please find your local contact and more contact details on our website:

www.dopag.com/contacts